



Waterjet Cutting System



Intec® "Light Series"

The Intec light series was developed to suit industries with lighter cutting needs. The machine is simple to load and operate, making it ideal in a production or semi-production environment. It is perfect for industries such as Gaskets, Sheet Metal, Tile & Stone, Sign Makers, Plastics, Foam & Rubber, Insulation, and Ducted Pipe System manufacturers.



www.techniwaterjet.com sales@techniwaterjet.com

ILS55.indd 1 3/5/07 11:03:45 AM

The Integrated 30HP Intensifier Pump is manufactured exclusively for Techni Waterjet and is capable of delivering 0.6 GPM at 55000 psi continuous running pressure. All high-pressure components are designed and manufactured by KMT, the world leader in intensifier technology. Incorporating an 8" plunger stroke (the longest in the industry) results in fewer strokes and therefore less maintenance and "down time", increasing the "VALUE" of your investment.




Every Intec® comes standard with Softec™ Waterjet Cutting Software, which has been developed by Techni Waterjet with two very clear goals in mind:

- To cut parts at the minimum cost with the greatest accuracy,
- To have a simple and intuitive interface with the operator.

The result, is a comprehensive "All-In-One" Windows based software, that is specifically designed for waterjet cutting. This maximizes productivity, and anyone with PC experience can learn to use quickly and easily. Softec™ incorporates many unique

DXF Importation,
Focusing Tube Wear
Compensation, Offsite Notification,
Multiple Origin Points,
Maintenance Counters,
Auto Mating Part
Clearance, Standard
Object Library, Re-start



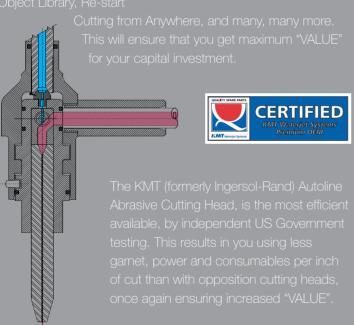

Specifications

Machine Size (L, W, H) (Does not include intensifiers or bulk abrasive hopper)	8' 3" x 8' 3" x 6 ' 7" (2500 x 2500 x2000mm)
Machine weight (empty)	3530 lbs (1600 kg)
Machine weight (with water)	8820 lbs (4000 kg)
Cutting table size	5' 5" x 6' 5" (1660 x1970mm)
Cutting Area	5' x 5' (1525 x 1525mm)
Accuracy of motion*	0.005" (± 0.12mm)
Repeatability of motion	0.001" (± 0.025mm)
Max Air speed	1000 ipm (25m/min)
Max cutting speed	1000 ipm (25m/min)
Max cutting pressure	55000 psi (3800 bar)
Max material thickness** (Water only)	9 1/4" (235mm)
Max material thickness*** (Abrasive)	4 1/2" (115mm)

Due to constant endeavour to improve the machine, the specification may be changed without prior notice.

- * Refer to machine specifications on website for details.
- ** Water only with 3" nozzle tube. *** Abrasive cutting with 4" nozzle tube.

Options

- Crash Sensing Break Away Head.
- 1/2 ton (500kg) Jib arm and 2 stage vacuum end-effector for easy material handling.
- Waste garnet recovery system.
- Bulk Abrasive Hoppers from 200 -1000 lbs (100-500kg) capacity.
- Twin cutting heads for increased production.
- Floating 'Z' axis to maintain 'stand off' on warped materials.
- Light Curtain Guarding System ensures maximum worker safety.
- Upgrade to full CNC machine operator interface. This enables the following options:
 - Tech-Sense[™] to monitor the cutting head and pause the program prior to any blockage, making "Lights Out" operation a reality.
 - Text Messaging protocol which enables 2-way communication between machine and mobile phone.

Service • Quality • Reliability

HEAD OFFICE - Melbourne

Techni Waterjet is committed to offering machines of the highest quality. The Intec® has been designed specifically for the very tough abrasive waterjet environment. It uses a minimum of moving parts, which have been manufactured from corrosion resistant materials. This ensures the reliability of the Intec® machines for many years after their installation. This is all backed up by highly trained service technicians, who will treat any problem you might encounter with the urgency you, our "valued" customer requires.

www.techniwaterjet.com sales@techniwaterjet.com



USA HEAD OFFICE - Kansas City

ILS55.indd 2 3/5/07 11:03:49 AM